

V219 Product Installation Tutorial

Note: Protect the exterior of the center console by covering it with a large towel.

Turn off the key switch and do not install while power is on.


Product accessories picture: Headphones are optional




Original car central control picture



1. Remove the cover behind the original car's central control display screen.

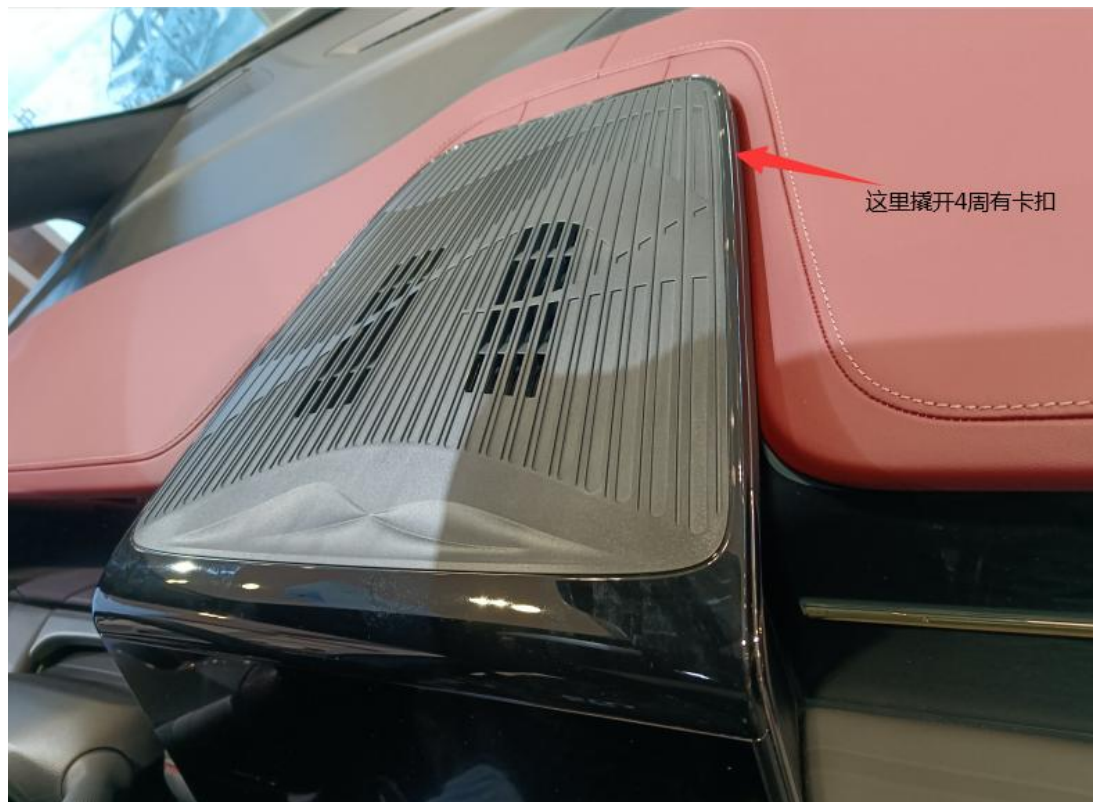


2. After removing the upper cover, there are 11 screws to be removed.

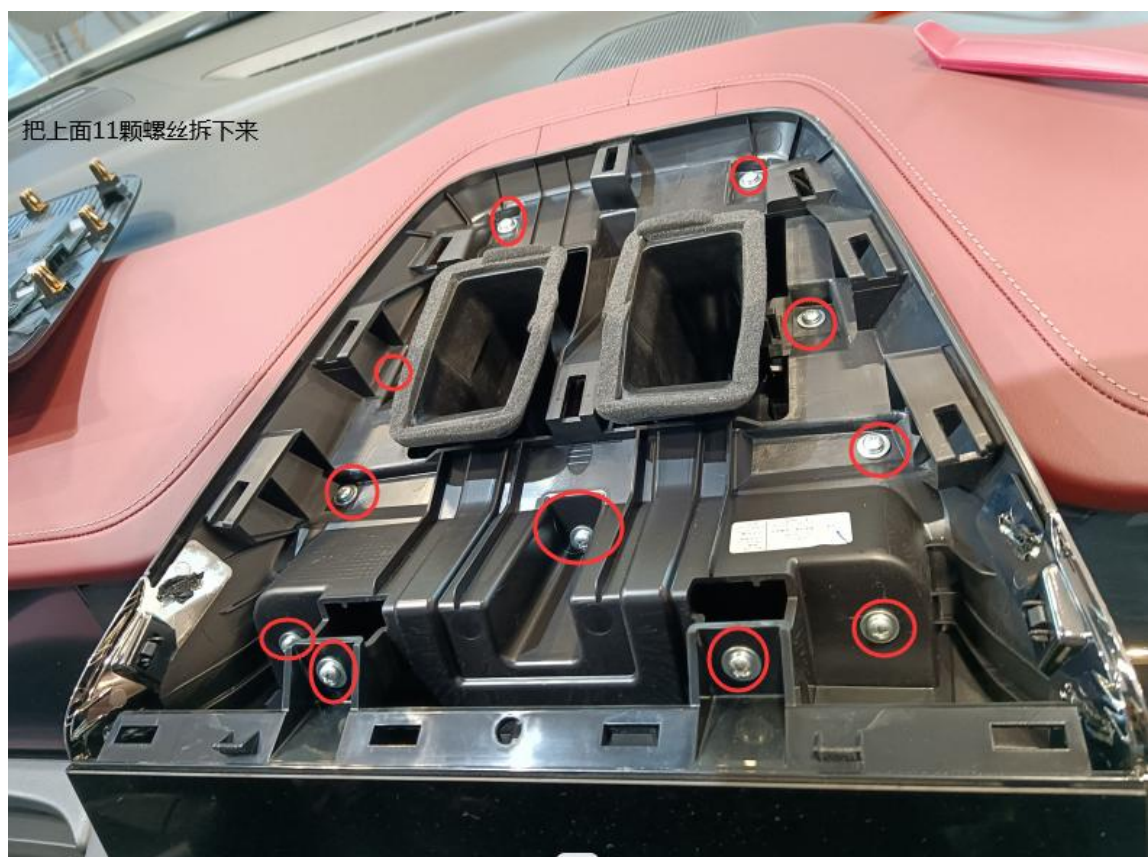

3. Remove the original car display



4. Unplug the two wires behind the display

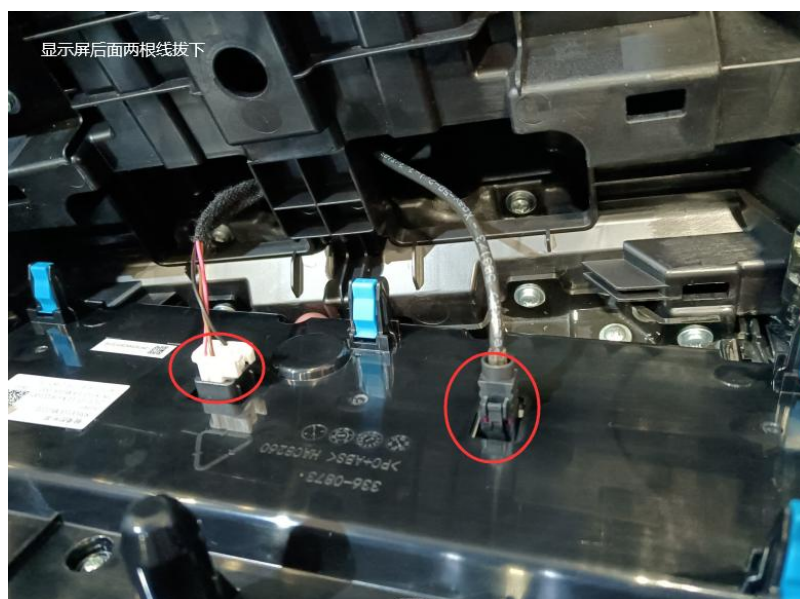


5. Remove the 8 screws on the back of the display and you can remove the display base.



6. Pry open the armrest storage box switch



7. The armrest box base after disassembly

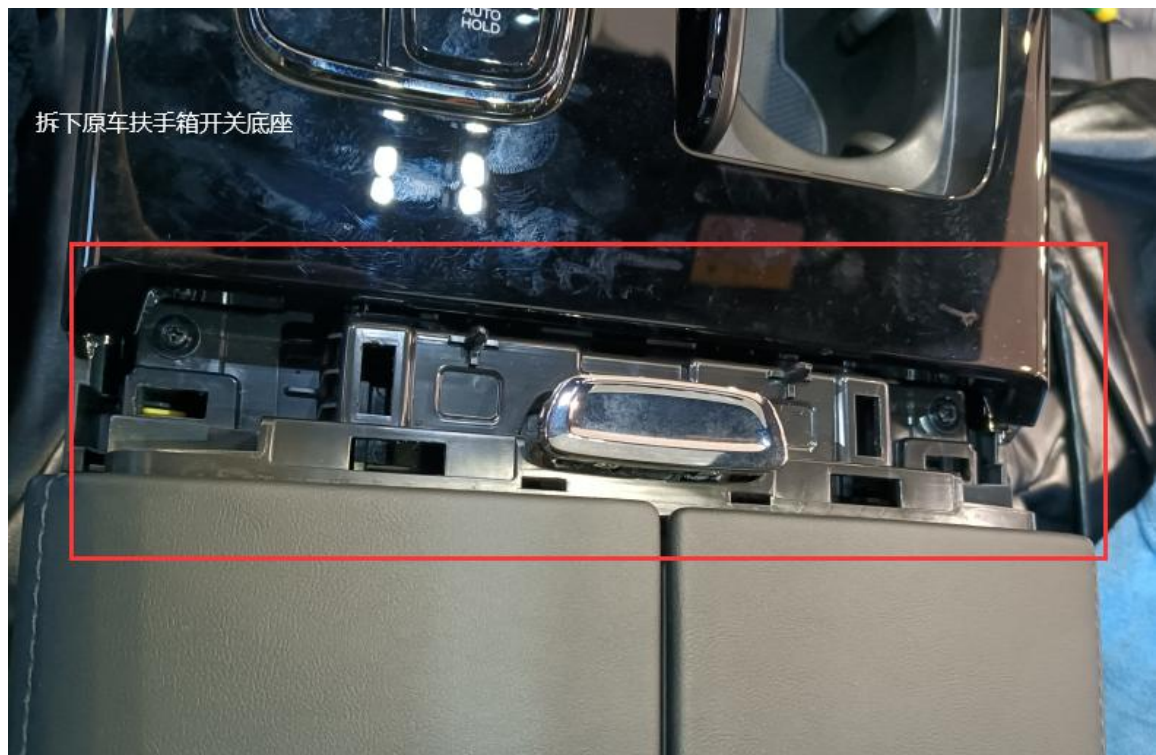

8. Remove the gear lever, hold it with both hands, shake it left and right and pull it up



9. After removing the gear lever, the entire middle piece can be removed



10. Remove the passenger leather panel




11. Remove the passenger leather panel base



12. Remove the co-pilot display screen cover




13. Connect the USB cable of the display to the storage box of the passenger seat.

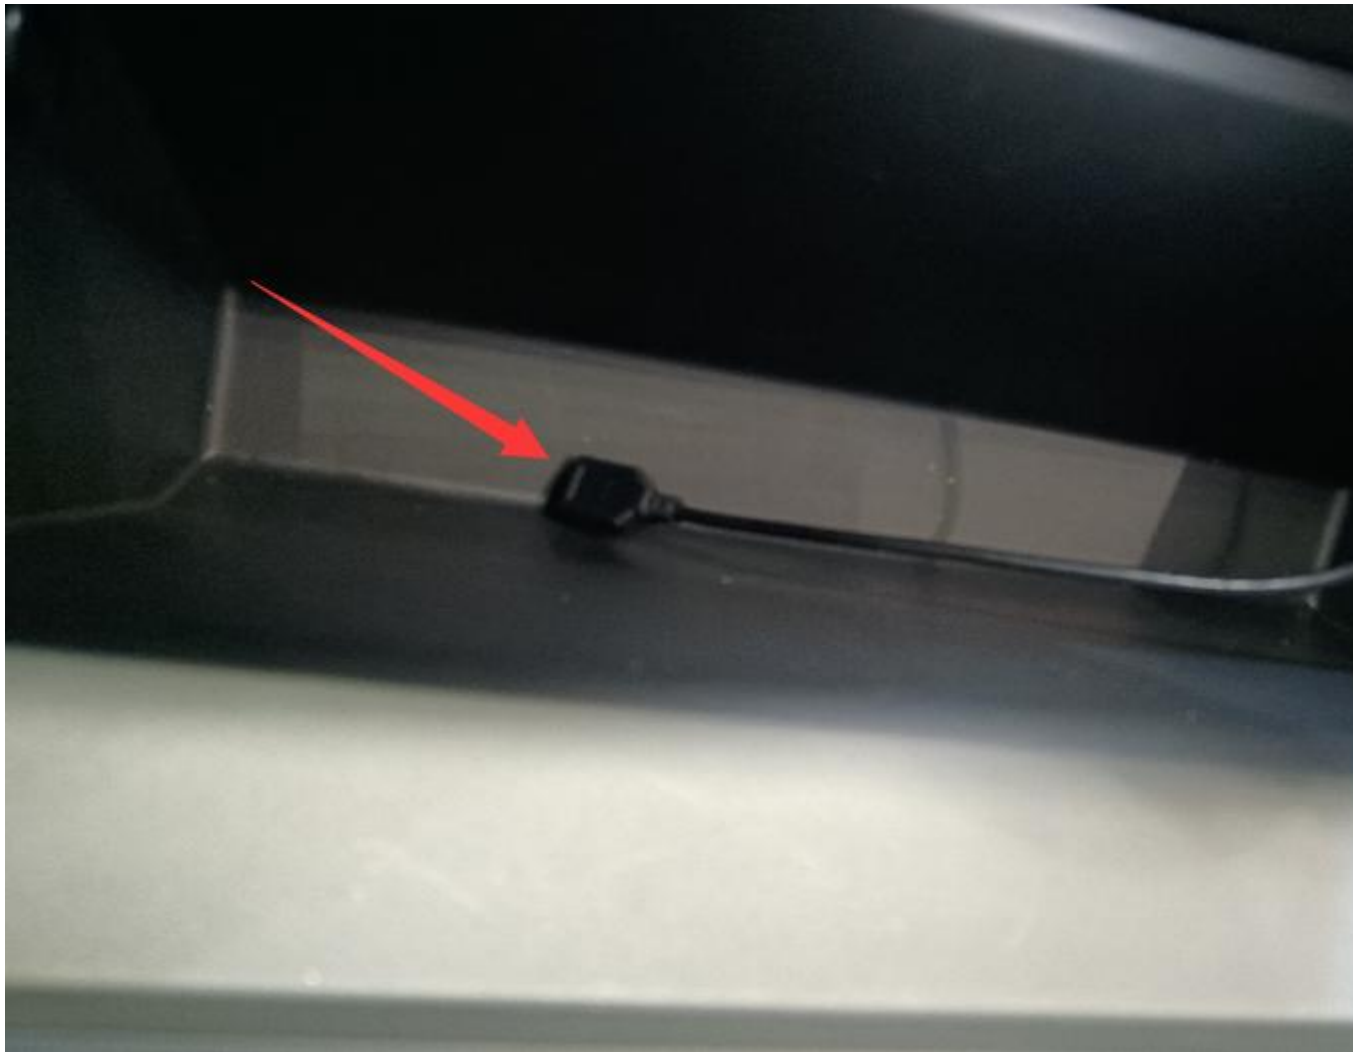

14. Put the power cord into the fuse box above the left foot of the driver and find the fuse position



15. The third one from the top on the right is ACC, and the seventh one is normal power (normal power).

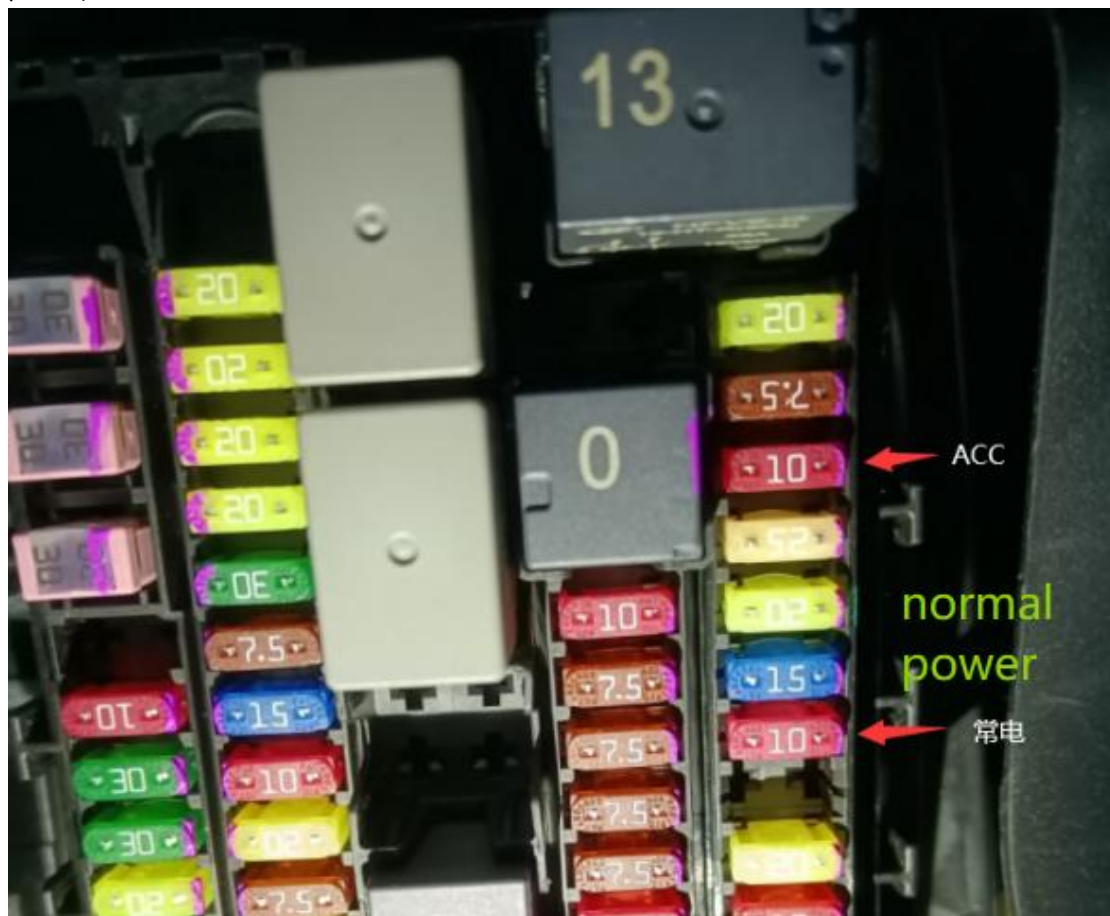

16. Pull out the ACC and normal power fuses and connect them to the wires



17. Connect the ground wire to the iron, loosen the original car screw to press the ground wire and then tighten the screw



18. After the wires are connected, power on the machine and test it. Install the screen in front of the co-pilot and fix it with three screws. The others are clips.



19. After the display is installed and tested, if there is no problem, just restore the central control in order.

20. The following is the effect picture of the installation

