

## V320 Product Installation Tutorial

### Note:

Pay attention to protecting the appearance of the central control, you can use a large towel to cover it.

Turn off the key switch and do not install with power on.

### Product accessories picture:



### Original car central control picture:



**Remove the original car's front panel. The original car has 12 buckles.**




**After removing the trim panel in front of the co-pilot, the original car buckle and the right air outlet need to be removed**



**Install the original car buckles and air vents to the corresponding buckles behind the V320 screen**



Thread the USB cable of the display and the network card slot cable into the storage box of the co-pilot

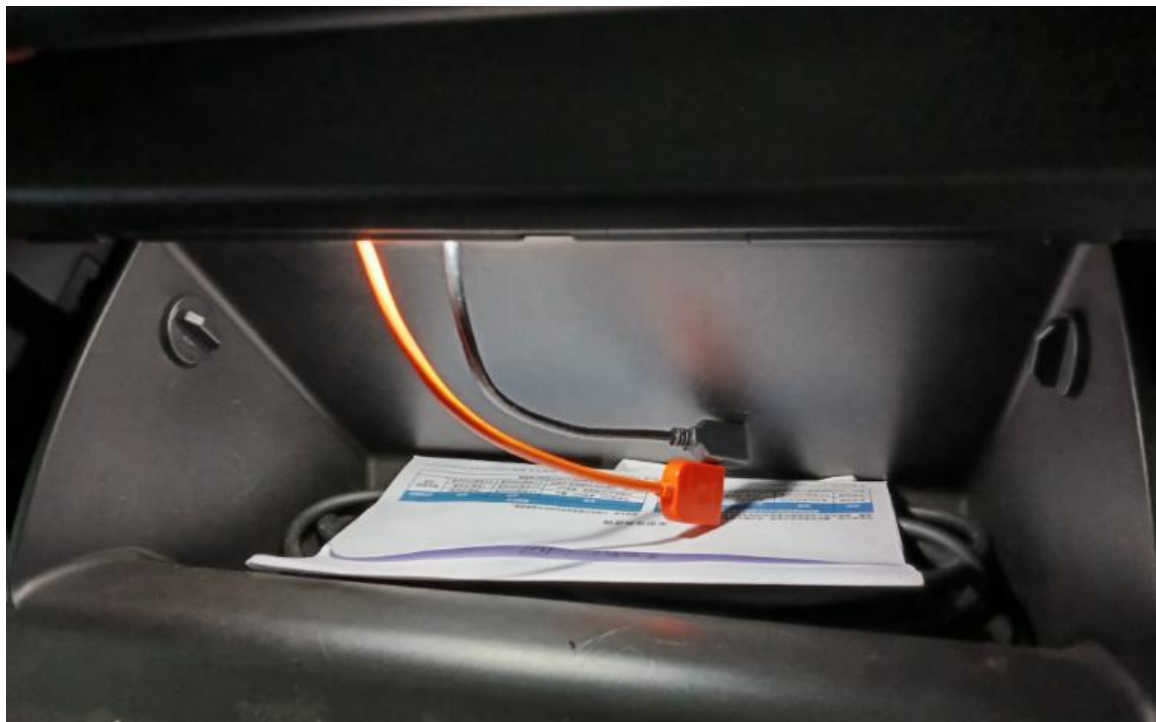

Open the small glove box above the left foot of the driver to see the fuse box






The fuse positions of B+ and ACC are shown in the figure.



**Pull out the ACC and normal power fuses and connect them to the wires**

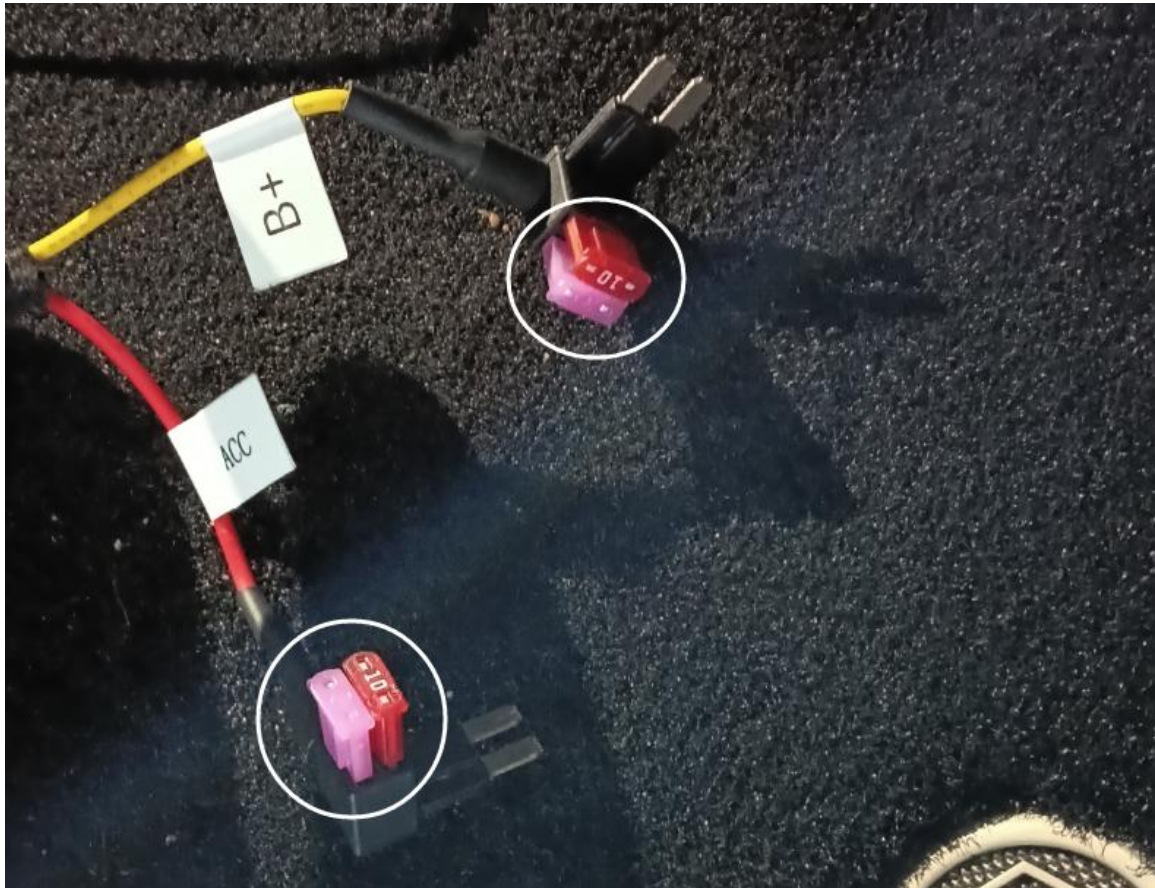

**Plug the fuses for the power cord and ACC back to their original positions.**





Loosen the original car screw to press the ground wire and then tighten the screw. Note that only the white screw can be grounded.



After the wires are connected, power on the machine to test it. Install the screen in front of the co-pilot and snap the buckles behind the screen into place.



The following is the effect picture after installation

