

Installation manual

Product name:

Multimedia-
Front and Rear Air Conditioning Control

Applicable vehicle models:

Toyota Coaster

Loading position

Car central control



Install accessories

| | |
|---|---|
|  <p>Host×1</p> |  <p>Motor ×4 control box×1</p> |
|---|---|


Installation tool

Bring your own installation tools


Installation notes

Pay attention to the appearance of the control center, you can lay a large towel on it; turn off the key switch, please do not install it with electricity

Installation steps

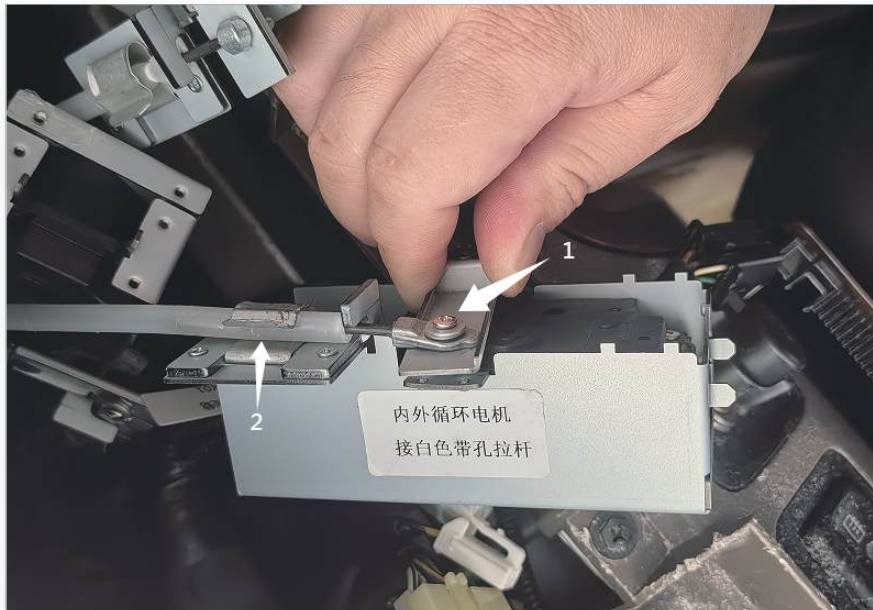


- 01** Inner loop switch control motor installation
1. The white pull rod with holes is secured with screws
 2. The white pull rod is fixed on the buck

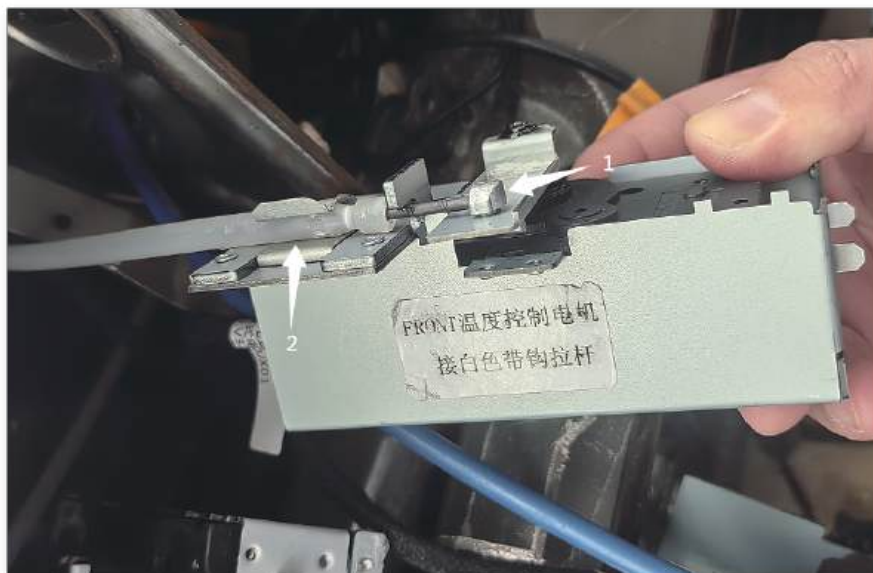

- 02** Previous temperature regulator motor installation
1. The white hook rod is directly clipped on
 2. The white pull rod is fixed on the buck

Installation steps

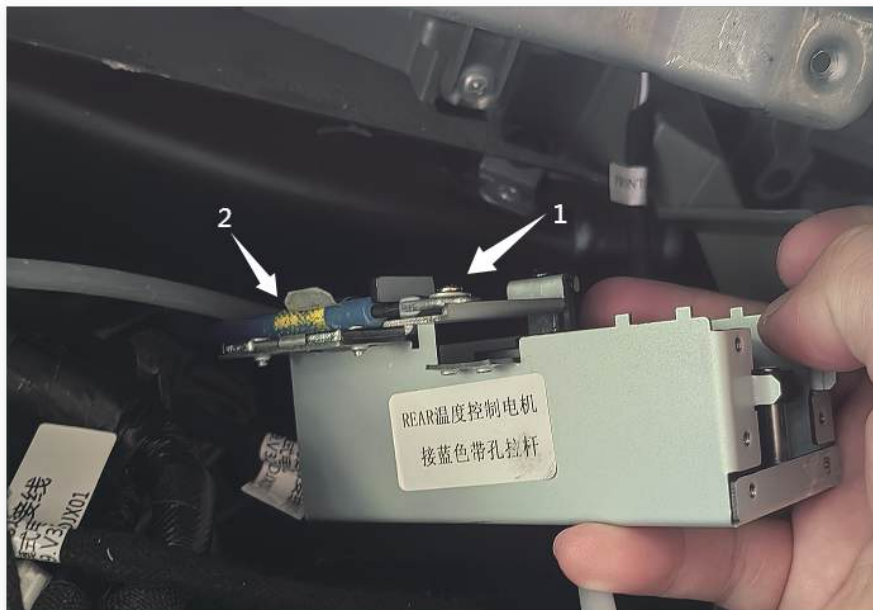

- 03 Post-temperature adjustment motor installation
1. The blue salad rod with holes is secured with screws
 2. The blue pull rod is fixed on the buck




- 04 Blower mode motor installation
1. The blue hook rod is directly clipped on
 2. The blue pull rod is fixed on the buck

Installation steps




- 05 After the 4 motors are installed, they are fixed to the hardware bracket with screws. You can fix them by looking at the length of the pull rod, of the order.

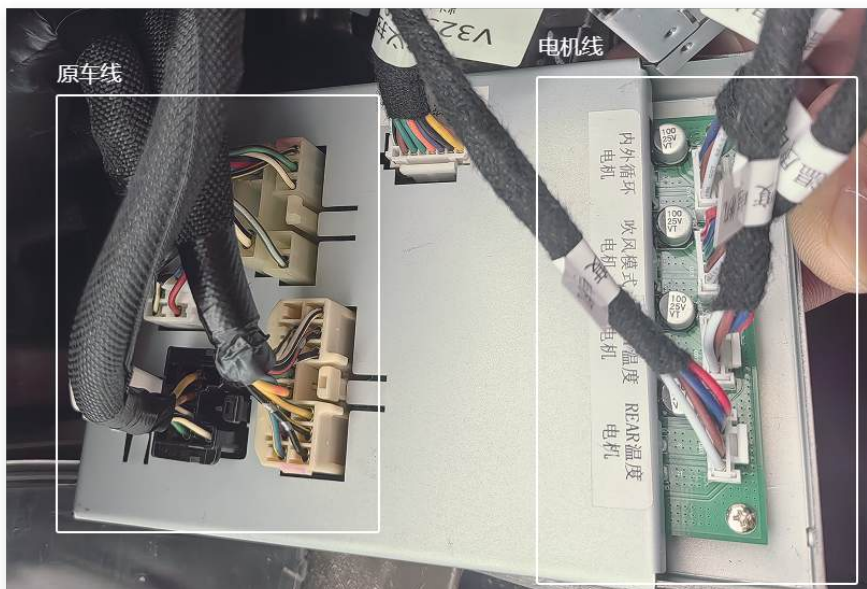

- 06 Plug the wires of the control box into the motor (note that the labels on the motor wires correspond to the labels on the control box)

Installation steps

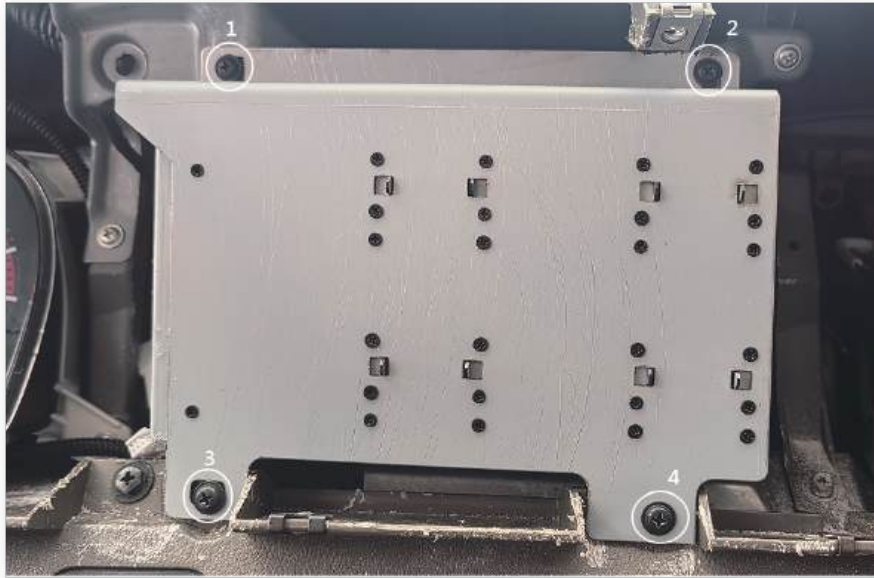


- 07 After the wire is inserted well, also fix the control box to the hardware bracket with screws, and then install it as a whole in the position where the original air conditioning switch was removed, and fix it with the original car's 4 screws.



- 08 The original car's left vents and the middle hazard switch are removed and installed on our panel.

Installation steps

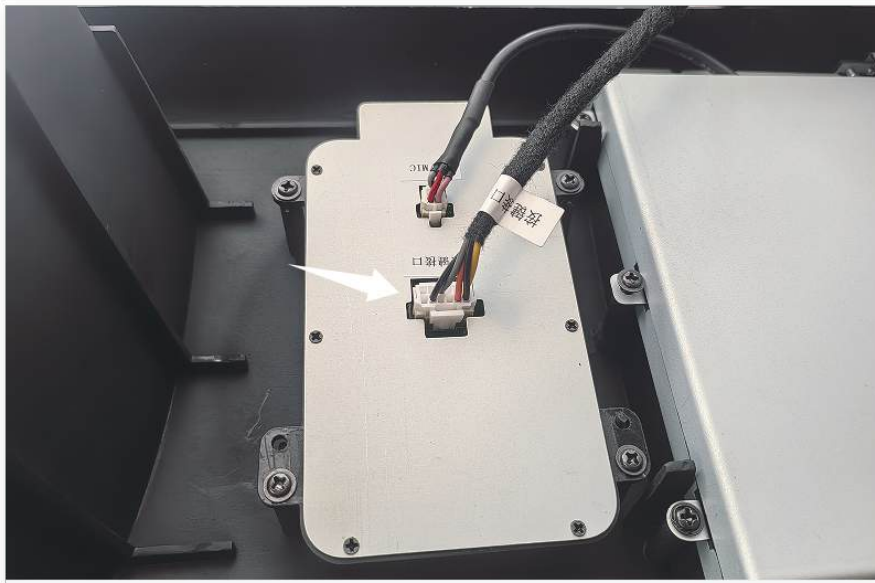

09 Plug-in key interface wire



10 Behind the display, the main host is connected to the line
1. Radio antenna; 2. Power cord; 3. Internet card slot line4G;
4. 360 main line (optional, not installed if not needed);
5. Serial port line (cannot control air conditioner without plugging);
6. 4P/USB line; 7. 6P/USB line; 8. Reverse line;
9 and 10 are G antennas; 11. GPS antenna.

Installation steps



- 11 After plugging in the used wire harness, power on to test that the function is normal. Then restore the central control. The above is the effect diagram.